

**Butterfly valve with Lug types**

- For open and closed cold and warm water systems
- For switching heat generators or cooling machines on/off


**Type overview**

| Type    | DN  | Kvmax<br>[m <sup>3</sup> /h] | Kvs<br>[m <sup>3</sup> /h] | PN      | n(gl) |
|---------|-----|------------------------------|----------------------------|---------|-------|
| D625NL  | 25  | 50                           | 24                         | 10 / 16 | 3.2   |
| D632NL  | 32  | 55                           | 25                         | 10 / 16 | 3.2   |
| D640NL  | 40  | 65                           | 27                         | 10 / 16 | 3.2   |
| D650NL  | 50  | 100                          | 30                         | 10 / 16 | 3.2   |
| D665NL  | 65  | 170                          | 50                         | 10 / 16 | 3.2   |
| D680NL  | 80  | 260                          | 75                         | 10 / 16 | 3.2   |
| D6100NL | 100 | 520                          | 150                        | 10 / 16 | 3.2   |
| D6125NL | 125 | 880                          | 260                        | 10 / 16 | 3.2   |
| D6150NL | 150 | 1400                         | 400                        | 10 / 16 | 3.2   |
| D6350NL | 350 | 10300                        | 3010                       | 16      | 3.2   |
| D6400NL | 400 | 14200                        | 4140                       | 16      | 3.2   |
| D6450NL | 450 | 18800                        | 5490                       | 16      | 3.2   |
| D6500NL | 500 | 24100                        | 7060                       | 16      | 3.2   |
| D6600NL | 600 | 37300                        | 10900                      | 16      | 3.2   |
| D6700NL | 700 | 42800                        | 11760                      | 16      | 3.2   |

The types D6200NL, D6250NL and D6300NL have been replaced by the types D6200WL, D6250WL and D6300WL. For technical data please check the datasheet D6..WL.

**Technical data**

|                        |                          |  |                         |
|------------------------|--------------------------|--|-------------------------|
| <b>Functional data</b> | Fluid                    | Cold and warm water, water with glycol up to max. 50% vol.                               |                         |
|                        | Fluid temperature        | -10...120°C [14...248°F]   |                         |
|                        | Flow characteristic      | 0...60% opening angle: equal percentage (VDI/VDE 2173)<br>0...100% opening angle: S-form |                         |
|                        | Leakage rate             | tight, leakage rate A (EN 12266-1)   |                         |
|                        | Angle of rotation        | 90°  |                         |
|                        | Pipe connection          | Flange<br>according to ISO 7005-2<br>according to EN 1092-2                              |                         |
|                        | Installation orientation | upright to horizontal (in relation to the stem)  |                         |
|                        | Servicing                | maintenance-free   |                         |
|                        | <b>Materials</b>         | Valve body   | EN-GJS-400-15 (GGG 40)  |
|                        |                          | Body finish  | polyester powder coated |
| Closing element        |                          | Stainless steel AISI 304 (1.4301)  |                         |

**Technical data**

|                  |                 |   |
|------------------|-----------------|---|
| <b>Materials</b> | Spindle         | Stainless steel AISI 420 (1.4021) (DN 25, 32, 40, 50, 65, 80, 100, 125, 150)<br>Stainless steel AISI 630 (1.4542) (DN 350, 400, 450, 500, 600, 700) |
|                  | Spindle seal    | EPDM O-ring   |
|                  | Spindle bearing | RPTFE   |
|                  | Seat            | EPDM  |

**Safety notes**


- The valve has been designed for use in stationary heating, ventilation and air-conditioning systems and must not be used outside the specified field of application, especially in aircraft or in any other airborne means of transport.
- Only authorised specialists may carry out installation. All applicable legal or institutional installation regulations must be complied with during installation.
- The valve does not contain any parts that can be replaced or repaired by the user.
- The valve may not be disposed of as household refuse. All locally valid regulations and requirements must be observed.
- When determining the flow rate characteristic of controlled devices, the recognised directives must be observed.
- The damper must be opened and closed slowly in order to avoid hydronic shocks in the pipe system.

**Product features**


- Operating mode** The butterfly valve is opened or closed completely by an open/close rotary actuator. Continuous rotary actuators are connected by a commercially available controller and move the valve to any position desired. The valve disk made of stainless steel is pressed into the soft-sealing EPDM seat by a rotary movement and ensures leakage rate A (tight). The pressure losses are slight in the open position and the kv value is at a maximum.
- Manual override** Manual throttling or isolation can be carried out with a lever or a worm gear (see «Accessories»).
- With lever (DN 25...150): Adjustable in 10 ratchet steps with position indication ( 0 = 0° (angle); 9 = 90° (angle) )
  - With worm gear (DN 25...700): steplessly adjustable (self-locking) with position indication.

**Accessories**

| <b>Electrical accessories</b> | <b>Description</b>                          | <b>Type</b> |
|-------------------------------|---|-------------|
|                               | Stem heater flange F05 (30 W)               | ZR24-F05    |
| <b>Mechanical accessories</b> | <b>Description</b>                          | <b>Type</b> |
|                               | Worm gear for butterfly valves DN 25...100  | ZD6N-S100   |
|                               | Lever for butterfly valves DN 25...100      | ZD6N-H100   |
|                               | Worm gear for butterfly valves DN 125...300 | ZD6N-S150   |
|                               | Lever for butterfly valves DN 125...150     | ZD6N-H150   |
|                               | Worm gear for butterfly valves DN 350       | ZD6N-S350   |
|                               | Worm gear for butterfly valves DN 400       | ZD6N-S400   |
|                               | Worm gear for butterfly valves DN 450       | ZD6N-S450   |
|                               | Worm gear for butterfly valves DN 500       | ZD6N-S500   |
|                               | Worm gear for butterfly valves DN 600       | ZD6N-S600   |
|                               | Worm gear for butterfly valves DN 700       | ZD6N-S700   |

Installation notes

**Permissible installation orientation** The butterfly valves may be mounted upright to horizontal. The butterfly valves may not be installed in a hanging position i.e. with the spindle pointing downwards.



**Water quality requirements** The water quality requirements specified in VDI 2035 must be adhered to.

**Spindle heater** In cold water applications and warm humid ambient air, condensation can be caused in the actuators. This can lead to corrosion in the gear train of the actuator and a breakdown of the actuator. In such applications, the use of a spindle heater is recommended. The spindle heater must only be activated when the system is in operation because it does not have a temperature controller.

**Servicing** Butterfly valves and rotary actuators are maintenance-free. Before any service work on the control element is carried out, it is essential to isolate the rotary actuator from the power supply (by unplugging the electrical cable if necessary). Any pumps in the part of the piping system concerned must also be switched off and the appropriate slide valves closed (allow all components to cool down first if necessary and always reduce the system pressure to ambient pressure level). The system must not be returned to service until the butterfly valve and the rotary actuator have been reassembled correctly in accordance with the instructions and the pipeline has been refilled by professionally trained personnel. To avoid a torque increase during off season shut down, exercise the butterfly valve (full open and close) at least once a month.

**Flow setting** The Belimo butterfly valves have an approximate equal percentage characteristic curve between 0...60% opening angle.

The following table shows the respective kv values in relation to the opening angle (%).

|        |           | 10% | 20%  | 30%  | 40%  | 50%  | 60%   | 70%   | 80%   | 90%   | 100%  |
|--------|-----------|-----|------|------|------|------|-------|-------|-------|-------|-------|
| DN 25  | kv (m3/h) | 0.1 | 2    | 6    | 10   | 15   | 24    | 36    | 46    | 48    | 50    |
| DN 32  | kv (m3/h) | 0.1 | 2    | 6    | 11   | 15   | 25    | 38    | 49    | 51    | 55    |
| DN 40  | kv (m3/h) | 0.1 | 2    | 6    | 11   | 16   | 27    | 41    | 59    | 62    | 65    |
| DN 50  | kv (m3/h) | 0.1 | 2    | 6    | 11   | 18   | 30    | 45    | 67    | 90    | 100   |
| DN 65  | kv (m3/h) | 0.1 | 4    | 9    | 17   | 30   | 50    | 76    | 110   | 160   | 170   |
| DN 80  | kv (m3/h) | 0.2 | 6    | 13   | 26   | 50   | 75    | 120   | 170   | 240   | 260   |
| DN 100 | kv (m3/h) | 0.2 | 12   | 26   | 50   | 90   | 150   | 230   | 350   | 480   | 520   |
| DN 125 | kv (m3/h) | 0.4 | 20   | 40   | 90   | 160  | 260   | 400   | 590   | 810   | 880   |
| DN 150 | kv (m3/h) | 1   | 30   | 70   | 140  | 250  | 400   | 620   | 910   | 1260  | 1400  |
| DN 350 | kv (m3/h) | 5   | 240  | 520  | 1050 | 1860 | 3010  | 4640  | 6880  | 9470  | 10300 |
| DN 400 | kv (m3/h) | 6   | 320  | 720  | 1450 | 2560 | 4140  | 6380  | 9460  | 13030 | 14200 |
| DN 450 | kv (m3/h) | 9   | 430  | 950  | 1920 | 3400 | 5490  | 8460  | 12530 | 17250 | 18800 |
| DN 500 | kv (m3/h) | 11  | 550  | 1220 | 2460 | 4370 | 7060  | 10870 | 16110 | 22190 | 24100 |
| DN 600 | kv (m3/h) | 17  | 850  | 1880 | 3800 | 6740 | 10900 | 16800 | 24890 | 34280 | 37300 |
| DN 700 | kv (m3/h) | 28  | 1260 | 2670 | 4700 | 7400 | 11760 | 17960 | 27340 | 37910 | 42800 |



## Installation notes

**Parametrisation linear characteristic curve**


The flow characteristic can be set to linear using the Belimo Assistant App.

The following table shows the respective kv values in relation to the control signal (%).

|        |                        | 10% | 20% | 30% | 40% | 50% | 60% | 70% | 80%  | 90%  | 100% |
|--------|------------------------|-----|-----|-----|-----|-----|-----|-----|------|------|------|
| DN 100 | kv (m <sup>3</sup> /h) | 52  | 104 | 156 | 208 | 260 | 312 | 364 | 416  | 468  | 520  |
| DN 125 | kv (m <sup>3</sup> /h) | 88  | 176 | 264 | 352 | 440 | 528 | 616 | 704  | 792  | 880  |
| DN 150 | kv (m <sup>3</sup> /h) | 140 | 280 | 420 | 560 | 700 | 840 | 980 | 1120 | 1260 | 1400 |


## Dimensions

## Dimensional drawings

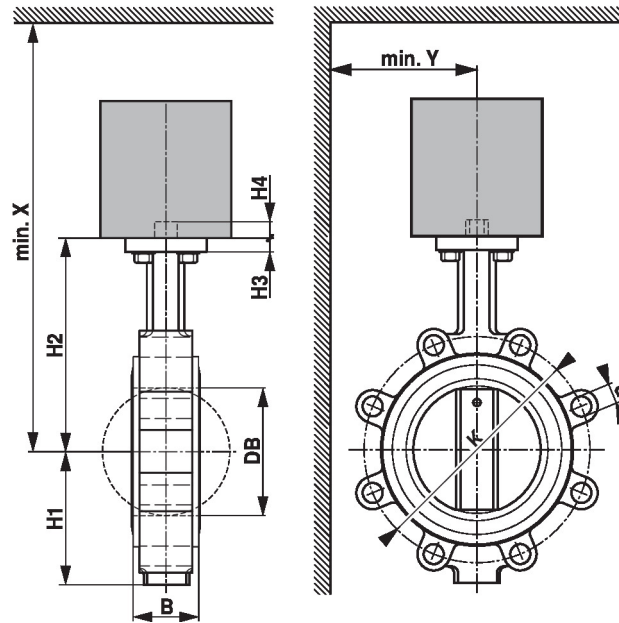

## Dimensions

| Type    | DN  | B<br>[mm] | DB<br>[mm] | H1<br>[mm] | H2<br>[mm] | H3<br>[mm] | H4<br>[mm] | d (PN10) K (PN10)<br>[mm] |
|---------|-----|-----------|------------|------------|------------|------------|------------|---------------------------|
| D625NL  | 25  | 32        | 30         | 53         | 90         | 10         | 13         | 4 x M12 85                |
| D632NL  | 32  | 33        | 35         | 60         | 100        | 10         | 13         | 4 x M16 100               |
| D640NL  | 40  | 33        | 42         | 68         | 119        | 10         | 13         | 4 x M16 110               |
| D650NL  | 50  | 43        | 52         | 72         | 133        | 11         | 13         | 4 x M16 125               |
| D665NL  | 65  | 46        | 64         | 81         | 147        | 11         | 13         | 4 x M16 145               |
| D680NL  | 80  | 46        | 78         | 96         | 158        | 11         | 13         | 8 x M16 160               |
| D6100NL | 100 | 52        | 103        | 106        | 170        | 11         | 13         | 8 x M16 180               |
| D6125NL | 125 | 56        | 122        | 122        | 194        | 15         | 19         | 8 x M16 210               |
| D6150NL | 150 | 56        | 155        | 140        | 202        | 15         | 19         | 8 x M20 240               |
| D6350NL | 350 | 78        | 333        | 266        | 361        | 15         | 24         |                           |
| D6400NL | 400 | 102       | 391        | 315        | 402        | 20         | 48         |                           |
| D6450NL | 450 | 114       | 442        | 328        | 420        | 20         | 48         |                           |
| D6500NL | 500 | 127       | 493        | 358        | 474        | 22         | 48         |                           |
| D6600NL | 600 | 154       | 594        | 454        | 559        | 22         | 48         |                           |
| D6700NL | 700 | 165       | 695        | 532        | 622        | 33         | 66         |                           |

| Type    | d (PN16) K (PN16)<br>[mm] | X<br>[mm] | Y<br>[mm] | <br>kg |
|---------|---------------------------|-----------|-----------|---|
| D625NL  | 4 x M12 85                | 320       | 150       | 1.3   |
| D632NL  | 4 x M16 100               | 340       | 150       | 1.6   |
| D640NL  | 4 x M16 110               | 350       | 160       | 1.7   |
| D650NL  | 4 x M16 125               | 370       | 160       | 2.5   |
| D665NL  | 4 x M16 145               | 380       | 170       | 3.1   |
| D680NL  | 8 x M16 160               | 390       | 180       | 4.4   |
| D6100NL | 8 x M16 180               | 410       | 190       | 5.1   |
| D6125NL | 8 x M16 210               | 530       | 210       | 7.7   |
| D6150NL | 8 x M20 240               | 540       | 220       | 8.9   |
| D6350NL | 16 x M24 470              | 1200      | 400       | 45  |
| D6400NL | 16 x M27 525              | 1300      | 500       | 92  |
| D6450NL | 20 x M27 585              | 1300      | 500       | 110   |
| D6500NL | 20 x M30 650              | 1700      | 600       | 150   |
| D6600NL | 20 x M33 770              | 1800      | 700       | 240   |
| D6700NL | 24 x M33 840              | 1800      | 800       | 320   |

## Further documentation

- The complete product range for water applications
- Data sheets for actuators
- Installation instructions for actuators and/or butterfly valves
- General notes for project planning